

# If you install, service or sell tankless water heaters...

## the Heater Treater®

"Low cost hard water scale protection for all tankless water heaters"

Economical enough to include on every tankless water heater installation

*A simple, low cost way to protect and extend the life of all tankless water heaters...*

*The perfect marriage between a water treatment process and a problematic hard water application...*



We now know how important water treatment is for maintaining efficiency and extending the life of tankless water heaters, but often times water treatment still is not utilized due to the additional cost. "the Heater Treater®" is the simple low cost solution for protecting all tankless water heaters from the effects of hard water scaling.

"the Heater Treater®" was developed by Dennis Falsken, a professional water treatment contractor with over 25 years experience in the water treatment industry. Being one of the first in his field to work directly with tankless water heaters, he immediately saw the need for an economical, effective way to reduce scaling in tankless water heaters. The Heater Treater didn't just happen, we put in many hours of research, field testing, utilized manufacturers input and our own experience to develop the first unit. This tradition continues with each new unit. Our history, experience with the tankless industry and product integrity is why the Heater Treater is the most widely used and recommended line of scale prevention products on the market today.

### HOW DOES IT WORK

the Heater Treater® is installed on the feed water line just prior to the tankless water heater. As the water passes through the filter cartridge the treatment media uniquely located in the interior of the filter, slowly dissolves into the water supply providing scale protection to the heater in several ways.

**FIRST:** The treatment media interferes with the ability of the calcium and magnesium to crystallize or become scale when heated. This by itself is a very effective scale prevention process.

**SECOND:** It lays down a thin protective coating on the interior of the heater (most importantly the heat exchanger) that does not allow any scale that might be created from adhering to the interior of the heater.

**LASTLY:** The 5 micron filter provides added protection from rust, sediment or debris that could affect the operation of the heater.

### IS THE TREATMENT MEDIA SAFE

The treatment media is 100% food grade material approved by the FDA, NSF, and World Health Association. This media is also odorless, tasteless and colorless.

### FEATURES

- Economically priced
- Minimal maintenance requirements
- Commercial quality components
- UV and chlorine tolerant
- Can be installed inside or outside
- CA AB 1953 compliant
- 3 Year Warranty



Filters tested and certified by NSF International to NSF/ANSI Standard 42 for material requirements only.




Filter Housings Tested and certified by NSF International to NSF/ANSI Standard 42 for material and structural integrity requirements.



Treatment Media is Siliphos II a Product of BK Gulmi tested and certified to NSF/ANSI Standard 60 for Drinking Water Treatment Chemicals.

### Our Treatment Process is What Separates the Treater from the Competition

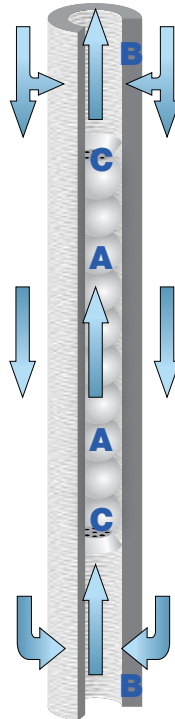

**A)** The appropriate amount of treatment media combined with the location and flow rate introduces the correct dosage for effective scale prevention throughout the life span of the cartridge.

**B)** The location of the treatment media is very important. Unobstructed areas on both ends of the filter allow for increased water flow, the life of the media is extended and less media is required. This lowers the cost and gives the filter cartridge a longer effective life span.

**C)** We have our own clips designed specifically for the filters we use. These clips hold the treatment media firmly in place without the use of a foreign substance, such as glue.

Distributed By:



### Model FtHT-20-REVFLO & Model FtHT-20-REVFLO-G

#### “New Reversible Flow Unit”

- Tankless Water Heaters Rated up to 9.8 GPM
- 3/4" FPT Inlet and Outlet (Standard)
- 25 1/4" Tall - 5 3/8" Wide
- Filter is 5 micron
- Pressure Relief Button
- Mounting Bracket and Hardware Included
- Flow Direction is Either Direction
- Shipping Weight 8.0 Lbs
- Replacement Filter: **tHT-20RF**

Comes with mounting bracket, hardware, gauge (w/ G Model) and wrench.

# “the Heater Treater®”

We were the first to identify the need for scale protection with tankless water heaters and the first to provide a solution

Ask for “the Heater Treater®” by name. The proven leader and most recommended scale prevention unit for tankless water heaters, tank water heaters and solar hot water systems.



### Model FtHT-BB

- Tankless Water Heaters Rated up to 15.0 GPM
- 1" FPT Inlet and Outlet (Standard)
- 1.5" Inlet and Outlet (also available)
- Filter is 5 micron
- 23 3/8" Tall - 7 1/4" Wide
- Pressure Gauge on Outlet Only
- Pressure Relief Button
- Separate Mounting Bracket
- Flow Direction is Either Direction
- Shipping Weight 12.0 Lbs
- Replacement Filter: **tHT-BBRF**

Comes with mounting bracket, hardware, gauge and wrench.



### Model FtHT-BB-HFC50

- For Multiple Tankless Water Heater Applications
- Rated up to 50.0 GPM
- 1.5" Inlet and Outlet
- Filter is 50 micron
- 23 3/8" Tall - 7 1/4" Wide
- Pressure Gauge on Outlet Only
- Drain Valve
- Separate Mounting Bracket
- Flow Direction is Either Direction
- Extra Filter Pack Included
- Shipping Weight 14.0 Lbs
- Replacement Filter: **tHT-BB-HFC50RF**

Comes with mounting bracket, hardware, gauge and wrench.



### Model FtHT-Commercial

- For multiple heater applications
- Units from 20 GPM up to 150 GPM
- 2" Inlet and Outlet
- Housings are Stainless Steel
- Flow direction is either direction
- Drain Adapters
- Fitting for Gauge
- \*Gauge Not Included



### Model FtHT-10

- Tankless Water Heaters Rated up to 5.0 GPM
- 3/4" FPT Inlet and Outlet
- 15" Tall - 5 3/4" Wide
- Filter is 5 micron
- Differential Pressure Gauge
- Pressure Relief Button
- Integrated Mounting Bracket
- Flow Direction is Left to Right
- Shipping Weight 5.0 Lbs
- Replacement Filter: **tHT-10RF**

Comes with mounting bracket, hardware, gauge and wrench.



### Condensate Neutralizer

#### FAL-HTILNF-12

- Simple, effective and environmentally friendly
- Comes complete with fittings and mounting bracket for most tankless water heater configurations
- Compact & visually pleasing design
- Replace annually or when the PH moves below 6.0
- Follow local code requirements for the discharge of condensate
- 12" long x 2.5" round
- Flow 3.8 gph gravity flow (14.4 L/Hour)



### Condensate Neutralizer

#### FAL-CN-UNIT

- For Single or Multiple Unit Applications
- Unique, innovative design
- Effectively neutralizes condensation
- Easy to clean & maintain
- Easy to replace refill cartridge - **FAL-CN-CART**
- Environmentally friendly
- 10 gph gravity flow.
- 8.25" x 10.75" x 2.25"
- Mounting Bracket & Hardware included.
- Easily Connects to Schedule 40 PVC Pipe